



Works when you do

Rotating LasersReady for the most challenging sites



GeoMax rotating lasers are built to meet the most demanding needs of any job.

Construction sites differ drastically, from modest jobs to complex designs and professionals need tools with extensive range and capabilities to do the job accurately and economically. GeoMax delivers proven, state-of-the-art technology that comes from the knowledge and experience of our parent company, Hexagon. Our rotating lasers offer long-lasting operation, multiple charging options, a full range of interchangeable accessories and more, all for the best price-to-performance ratio.



Scan to find the entire

Rotating laser product line on our website







geomax-positioning.com ©2022 Hexagon AB and/or its subsidiaries and affiliates. All rights reserved.

Zone20 HBuilt simple, rugged and affordable





ZONE20 H

Zone20 H is an economic and rugged entry level rotating laser. With a solid built housing and a straightforward interface, this laser offers all functions needed for regular and flexible use. Zone20 H is a horizontal laser that allows grade setting manually in two axes. It is easy to use and highly reliable in any element.



Zone20 HV

Multipurpose laser for indoor and outdoor use





ZONE20 HV

The multipurpose Zone20 HV offers the Zone20 H basic specifications, plus the capability of vertical leveling and aligning. It includes a long-range remote to adjust and align easily on any job site. To support the toughest working conditions, the rotating head is fully enclosed and the laser complies with IP67 class, making it the perfect multipurpose laser for any professional.



Zone60 HG

Made for high accuracy leveling





ZONE60 HG

Featuring easy-to-use, dial-in grade capabilities this laser is more flexible in use and enables semi-automatic grade in leveling applications. The Zone60 HG allows a grade up to 8% slope in both axes with high accuracy. This rugged laser is an ideal solution for exterior applications like concrete and form work.



Zone60 DG

Fully automatic and fully dependable





ZONE60 DG

The Zone60 DG is a fully-automatic grade laser in both axes, specifically designed for crews that require dependability and accuracy on a daily basis. Digital grades can be entered up to 15% slope making it suitable for almost any construction site.

Save even more time by using this laser with the ZRD105B laser receiver, which automatically catches and monitors the laser's beam.



Zone75 DG

Stabilized to perform on longer distances





ZONE75 DG

Capable of operating at a speed of 15 rps (rotations per second), the Zone75 DG is a perfect fit for machine guidance solutions. With a laser beam that is stable over longer distances, it is especially suited for land levelling and agriculture applications. For optimal land use, Zone75 DG not only gives you a reference for horizontal planes but also for slopes up to 15%.



Zone Laser Rotators

All for the best price-to-performance ratio



Technical Data

Extensive range and capabilities







	Zone20 H	Zone20 HV	Zone60 HG
Description	Self-leveling horizontal manual slope in dual axes	Self-leveling horizontal, vertical, 90° manual slope in dual axes	Self-leveling horizontal digital slope in dual axes (semi-automatic).
Operating Range	900 m / 3000 ft (diameter)	900 m / 3000 ft	900 m / 3000 ft
Self-leveling accuracy	± 2.2 mm at 30 m (± 3/32" at 100 ft)	± 2.2 mm at 30 m (± 3/32" at 100 ft)	± 5°
Self-leveling range	± 6°	± 5°	8 %
Grade range			± 1.5 mm at 30 m (±1/16" at 100 ft)
Rotation Speed	600 rpm	120, 300, 600 rpm	600 rpm
Laser diode type/class	635 nm (visible) / class 1	635 nm (visible) / class 2	635 nm (visible) / class 1
Batteries type	4 D-cell alkaline / Li-Ion	4 D-cell alkaline / Li-Ion	4 D-cell alkaline / Li-Ion
Battery life	> 60h (alk) / > 40h (Li-Ion)	> 60h (alk) / > 40h (Li-Ion)	> 60h (alk) / > 40h (Li-Ion)
Operating Temps.	-10°C to 50°C 14°F to 122°F	-10°C to 50°C 14°F to 122°F	-10°C to 50°C 14°F to 122°F
Storage Temp.	-30°C to 70°C -22°F to 158°F	-30°C to 70°C -22°F to 158°F	-30°C to 70°C -22°F to 158°F
Protection	IP67	IP67	IP67





	ZRB90 Basic	ZRP105 Pro
Working diameter	600 m (6000 ft)	900 m (3000 ft)
Extended detection window	80 mm / 3.1 in	105 mm / 4 in
Numeric readout height	-	-
Beam catching	-	-
Beam lock	-	-

Works when you do





	Zone60 DG	Zone75 DG
Description	Self-leveling horizontal, vertical, digital slope in dual axes (fully automatic). Beam catching option.	Self-leveling horizontal, vertical, digital slope in dual axes (fully automatic). Beam catching option.
Operating Range	900 m / 3000 ft	1100 m / 3600 ft
Self-leveling accuracy	± 5°	± 5°
Self-leveling range	Up to 15 %	Up to 15 %
Grade range	± 1.5 mm at 30 m (±1/16" at 100 ft)	± 1.5 mm at 30 m (±1/16" at 100 ft)
Rotation Speed	300, 600 rpm	300, 600, 900 rpm
Laser diode type/class	635 nm (visible) / class 1	635 nm (visible) / class 1
Batteries type	4 D-cell alkaline / Li-Ion	Li-Ion
Battery life	> 60h (alk) / > 40h (Li-Ion)	> 50h
Operating Temps.	-20°C to 50°C -4°F to 122°F	-20°C to 50°C -4°F to 122°F
Storage Temp.	-30°C to 70°C -22°F to 158°F	-30°C to 70°C -22°F to 158°F
Protection	IP67	IP67






	ZRD105 Digital	ZRD105B
Working diameter	900 m (3000 ft)	900 m (3000 ft)
Extended detection window	105 mm / 4 in	105 mm / 4 in
Numeric readout height	90 mm / 3.5 in	90 mm / 3.5 in
Beam catching	-	✓
Beam lock	-	✓

GeoMax Laser FeaturesWhere Technology and Simplicity Meet



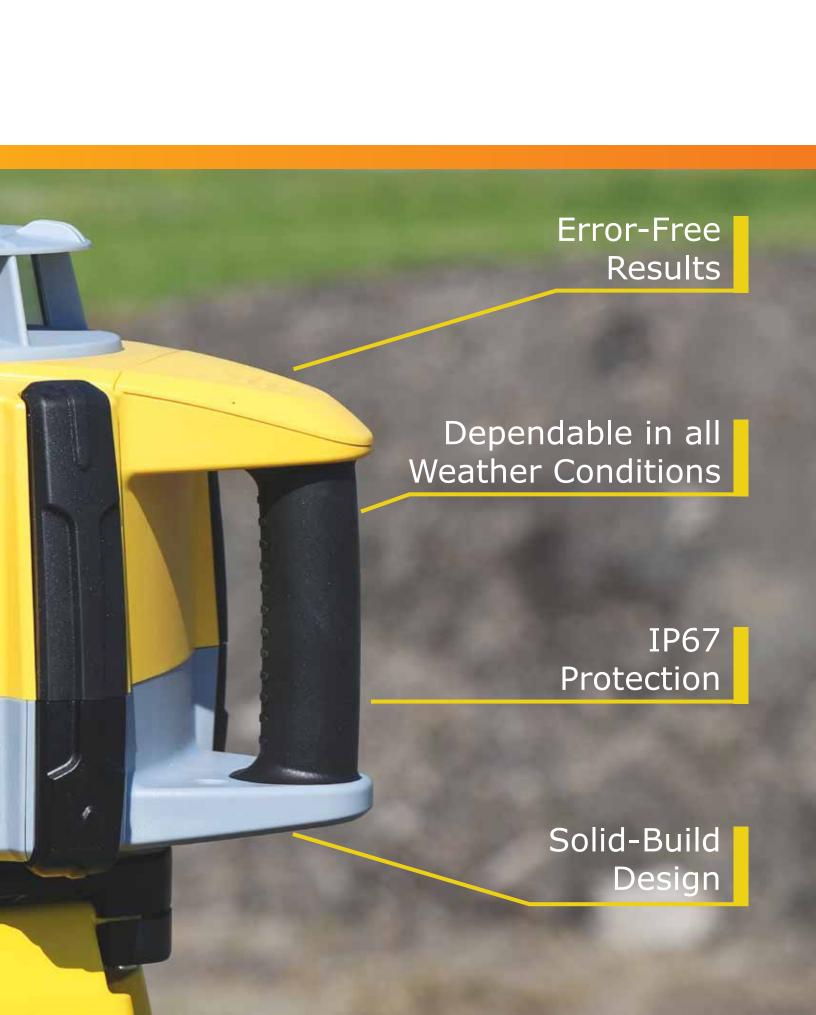

Site Applications

Dependable in any element



CONCRETE POURING AND FORM WORK

Whether you need an exact reference to pour concrete or an accurate alignment of the framework, GeoMax laser rotators will accomplish the task, save you money and time.



BATTERBOARD APPLICATIONS

Connect batterboard points to mark out the axis with the push of a button, thanks to the beam catching feature of the ZRD105B, which maintains an accurate setup by monitoring the connection.



INTERIOR CONSTRUCTION

Our multi-purpose rotating lasers offer you the flexibility of operating vertically and horizontally, with optional interchangeable accessories to maximize efficiency, IP67 protection, and a fully enclosed head to support the toughest working conditions




ROAD GRADING

Grade the base course for a road, level its slope, and correct and remove irregularities with the help of GeoMax rotating lasers. They guarantee you repeatable and accurate results in long distances even in the toughest working conditions.

Experience the full lineup

Add more value with additional construction solutions

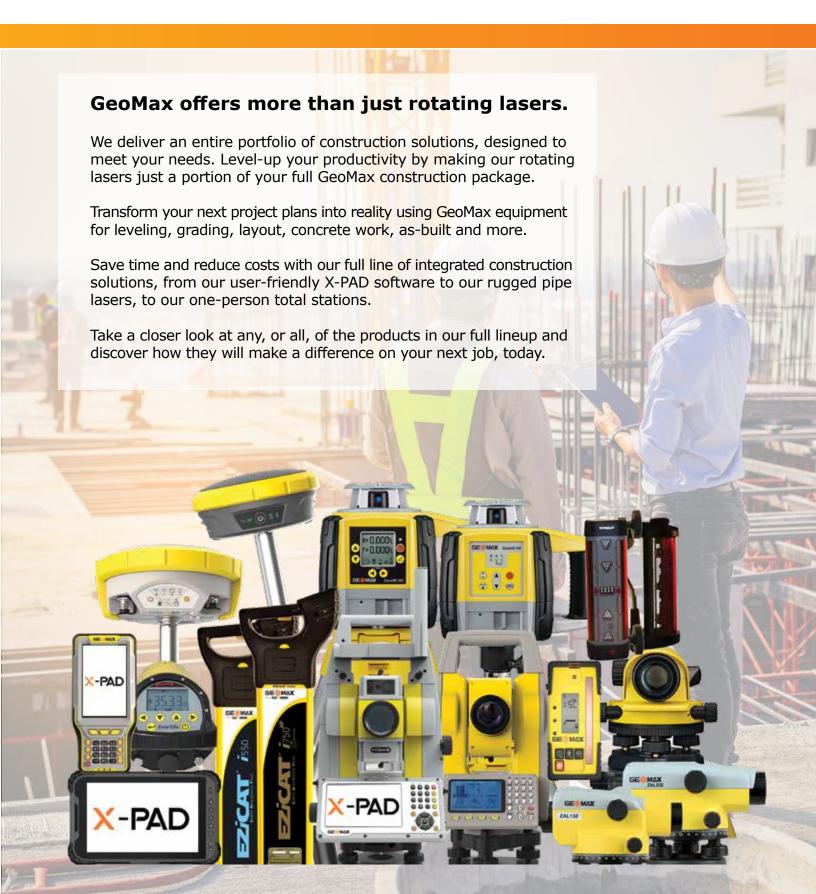

GeoMax additional offerings

Providing more for your success



Rotating Laser accessories

GeoMax offers a full range of interchangeable accessories to accommodate your unique job requirements. Ask about available packages.

Hexagon - Guaranteed reliability

Hexagon is known for driving innovation and technological progress. As part of this group, GeoMax can quarantee its solutions work when you do.



Worldwide GeoMax technical & training services

The GeoMax global support team is located around the world - support is available 24 hours a day. With the Total Care Shield Warranty, GeoMax helps you keep your costs under control and reduce the downtime of your GeoMax instruments to a minimum.

GeoMax service centers are at your disposal worldwide.

https://geomax-positioning.com/contact-us/find-a-distributor



GeoMax Academy offers regular technical online webinars. Watch them on demand: https://geomax-positioning.com/services-and-support/webinars





Distance meter (Prism Mode): Laser class 1 in accordance with IEC 60825-1 resp. EN 60825-1; Laser plummet: Laser class 2 in accordance with IEC 60825-1 resp. EN 60825-1, Distance meter (Non-Prism Mode accXess): Laser class 3R in accordance with IEC 60825-1 resp. EN 60825-1







Copyright GeoMax AG.

Illustrations, descriptions and technical specifications are not binding and may change.