


# SP30

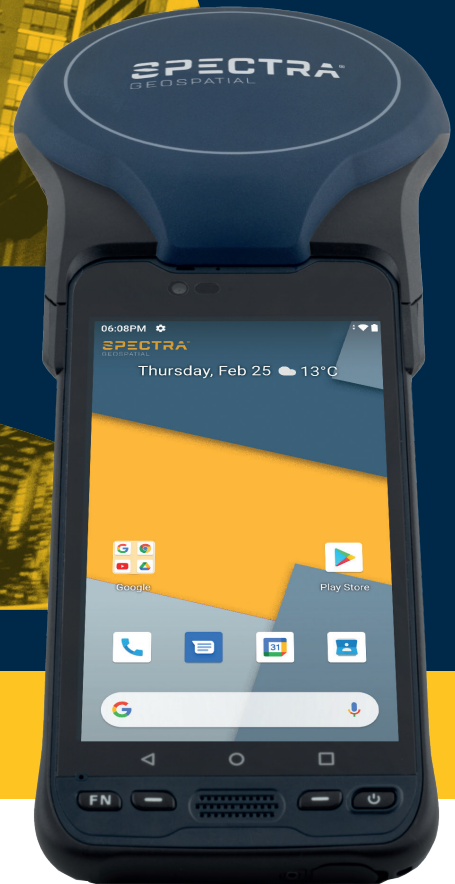

## DATASHEET

**High accuracy GNSS handheld**

**Android™ 10 operating system**

**6-inch high resolution sunlight-readable display**

**Powerful Qualcomm® processor with 4 GB RAM and 64 GB internal storage**

**Large capacity, user replaceable all day battery**

**Ultra-rugged design with MIL-STD-810 certification**

**4G LTE, Wi-Fi, Bluetooth® connectivity options for voice calls and data**

### **Spectra Geospatial SP30, the ideal integrated solution.**

The Spectra Geospatial® SP30 is the highly accurate handheld receiver that delivers unparalleled convenience and cost-efficient high performance.

Powerful, easy-to-use with Android™ 10 OS, support for RTX L-band, and RTK accuracy, it is like no other handheld. And it features an array of upgrades compared to previous product versions, including a faster processor, more RAM and data storage, an improved camera, a brighter, six-inch, all-weather display, and a bigger battery.

Versatile and scalable, you can rely on the Spectra Geospatial SP30, whatever the project. With several accuracy levels, it's the ideal compact solution for any task or budget.

Spectra Geospatial SP30, Work faster. Work longer. Work better.



85 11th Street | Ambridge, PA 15003  
724-266-1600 | [PLI@laserinst.com](mailto:PLI@laserinst.com)

**SPECTRA**  
GEOSPATIAL®

[spectrageospatial.com](http://spectrageospatial.com)

**GNSS CHARACTERISTICS**

- 240 GNSS channels
  - GPS L1 and L2
  - GLONASS L1 and L2
  - BeiDou B1 and B2
  - Galileo E1 and E5b
  - QZSS L1 and L2
  - SBAS L1 (WAAS, EGNOS, MSAS, GAGAN)
  - L-band
- Scalable accuracy from meter to centimeter (meter, sub meter (30/30), decimeter (7/2), centimeter)
- Patented Z-Blade technology for optimal GNSS performance
- Full utilization of signals from all 6 GNSS systems (GPS, GLONASS, BeiDou, Galileo, QZSS and SBAS)
- Enhanced GNSS-centric algorithm fully-independent GNSS signal tracking and optimal data processing, including GPS-only, GLONASS-only or BeiDou-only solution (autonomous to full RTK)
- Fast Search engine for quick acquisition and re-acquisition of GNSS signals
- Patented SBAS ranging for using SBAS code & carrier observations and orbits in RTK Processing
- Patented Strobe™ Correlator for reduced GNSS multi-path
- Supported data formats: ATOM, CMR, CMR+, RTCM 2.1, 2.3, 3.0, 3.1 and 3.2 (including MSM), CMRx and sCMRx
- External antenna connector (TNC)
- Protection against future LTE and 5G signals thanks to new TALLYSMAN™ extended filtering technology

**REAL-TIME ACCURACY (RMS) <sup>1,2</sup>**

**Meter (SBAS only)**

- Horizontal: >70cm
- Vertical: > 90 cm

**Sub-Meter**

- Horizontal: 30cm
- Vertical: 30cm

**Decimeter**

- Horizontal: 7cm
- Vertical: 2cm

**Centimeter <sup>3</sup>**

- Horizontal: 10 mm + 1 ppm
- Vertical: 15 mm + 1 ppm

**REAL-TIME PERFORMANCE**

- Instant-RTK® Initialization
  - Typically 2 sec for baselines < 20 km
  - Up to 99.9% reliability
- RTK initialization range: over 40 km

**TRIMBLE RTX POSITIONING <sup>4</sup>**

- FieldPoint™ RTX: 10 cm horizontal
- Initialization Fast: < 5 min

**POST-PROCESSING ACCURACY (RMS) <sup>1,2</sup>**

**Static & Fast Static**

- Horizontal: 3 mm + 0.5 ppm
- Vertical: 5 mm + 0.5 ppm

**High-Precision Static**

- Horizontal: 3 mm + 0.1 ppm
- Vertical: 3.5 mm + 0.4 ppm

**DATA LOGGING CHARACTERISTICS**

- Recording interval: 1 - 999 seconds

**PROCESSOR**

- Qualcomm Snapdragon 626
- Clock frequency: 2.2 GHz

**OPERATING SYSTEM**

- Android® 10 (Google certified)
- Android Security Updates provided until December 2024
- Software package includes: Google Mobile Services

**MEMORY**

- 4 GB RAM
- Storage: 64 GB (non volatile).
- MicroSDXC™ memory card (up to 256 GB)

**COMMUNICATIONS**

- Cellular
  - GSM (850,900,1800,1900), WCDMA (B1, B2, B5, B8), LTE-FDD(B1, B2, B3, B4, B5, B7, B8, B12, B13, B17, B20, B25, B28), LTE-TDD (B38/B39/ B40/B41), TD-SCDMA (B34, B39)
- Nano SIM x2
- Wi-Fi (IEEE) 802.11 a/b/g/n/ac
- Bluetooth 4.1
- NFC (13.56 MHz)
- USB 3.0 (Type C)

**ENVIRONMENTAL CHARACTERISTICS**

- Operating temperature: -20° to +55°C (-4 to 131°F) <sup>5</sup>
- Storage temperature: -40° to +70°C without battery (-40 to 158°F) <sup>5</sup>
- Humidity: 5% to 90% RH, non-condensing. According to MIL-STD-810H 507.6
- Water & dust proof: IP67 (IEC 60529)
- Salt fog (MIL STD 810 H method 509.7)
- Free drop: 1.2 m (3.9ft), 10 drops (2 faces, 4 edges and 4 corners) on concrete
- Shocks: MIL STD 810G (fig 516.6-10 Procedure I)
- Vibration: MIL-STD-810G (fig 514.6C1-Cat4)
- Altitude: MIL-STD-810G-2014 Method 500.5

**POWER CHARACTERISTICS**

- Battery Li-Ion: 8000mAh
- Battery life: > 8 hrs @ 20 °C (68°F) with GNSS on
- Charging time: 4 hours
- Removable battery

**PHYSICAL CHARACTERISTICS**

- Size: 30.6 x 12.2 x 4.7 cm (12 x 4.8 x 1.8 in)
- Weight: 790 g (1.74 lb)

**User interface**

- 2 volume keys, on/off key, 4 programmable keys, standard Android touch panel 3 buttons
- On screen keyboard display
- Size: 6.0" capacitive multi touch
- Resolution: 1920 x 1080 pixels
- Brightness: 450 Cd/m2
- Panda glass 3 damage-resistant
- Auto rotate between Portrait and Landscape

**MULTIMEDIA & SENSORS**

- Rear camera: 13 M pixels with auto-focus and LED flash
- Front camera: 5 M pixels with fixed focus
- E-Compass
- Gyrometer
- Accelerometer
- Ambient light sensor
- Barometer
- Speaker
- Microphone
- Light sensor

**STANDARD ACCESSORIES**

- Handstrap
- Screen protectors (x2)
- A/C charger
- USB cable
- Pouch
- Battery door opener
- Monopole adaptor

**OPTIONAL ACCESSORIES**

- External GNSS antenna
- Pole bracket
- Monopole
- Dual-battery charger

**OPERATING MODES**

- RTK rover: Direct IP, NTRIP (VRS,FKP,MAC networks)
- Post-processing with MobileMapper Office
- Trimble RTX IP or Satellite (both exhibit excessive power consumption)

**FIELD SOFTWARE**

- Origin LT
- Origin GNSS
- MobileMapper Field
- Penmap
- TerraFlex
- or 3rd party Android applications

1. Accuracy and TTFF specifications may be affected by atmospheric conditions, signal multipath, satellite geometry and corrections availability and quality.
2. Performance values assume minimum of five satellites, following the procedures recommended in the product manual. High multipath areas, high PDOP values and periods of severe atmospheric conditions may degrade performance. Except for Meter (SBAS only), real time accuracies require RTK corrections. PP accuracy obtained with ATOM files processed by SP50.
3. SP30 cm used with Monopole accessory
4. RTX on SP30 is not supported outside RTX Fast areas (<https://positioningservices.trimble.com/resources/coverage-maps/>).
5. Batteries can be stored up to +70°C.

**CONTACT INFORMATION:**

**Americas**

10368 Westmoor Drive  
Westminster, CO 80021 • USA  
+1-720-587-4700 Phone  
888-477-7516 (Toll Free in USA)

**Europe, Middle East and Africa**

Rue Thomas Edison  
ZAC de la Fleuriaye - CS 60433  
44474 Carquefou (Nantes) • FRANCE  
+33-(0)2-28-09-38-00 Phone

**Asia-Pacific**

80 Marine Parade Road  
#22-06, Parkway Parade  
Singapore 449269 • SINGAPORE  
+65-6348-2212 Phone

Please visit [spectrageospatial.com](https://spectrageospatial.com) for the latest product information and to locate your nearest distributor. Specifications and descriptions are subject to change without notice.