

TrueView GO 132S

Step Up Your 3D Mapping with the TrueView Go 132S - Enhanced Point Density for More Detailed Models

Introducing the TrueView GO 132S by GeoCue, an upgraded handheld mapping system for seamless indoor and outdoor reality capture and high-definition 3D mapping. This state-of-the-art device features 32 channels, three 5MP high-resolution RGB cameras, and a sophisticated 3D LiDAR & Imagery scanner, easily converting complex environments into precise digital twins.



LiDAR Sensor

- **Data Collection:** LIDAR, Imagery, GNSS and SLAM
- **Sensor:** Survey Grade, Class 1 Eye Safe laser @ 905nm
- **Range:** 0.5 m to 300 m
- **Range - Usable:** 80 m @ 10% Reflectivity
- **Beams/Returns:** 32/2
- **FOV - Horizontal:** 270°
- **FOV - Vertical:** 40.3° (-20.8, 0, +19.5)
- **Pulse Rate:** 320 kHz

Platform

- **Size:**
 - Length: 213.5 mm
 - Width: 126 mm
 - Height: 317 mm
- **Weight:** 1.7 kg (including RTK and battery)
- **Power Supply Mode:** Lithium Battery, supports hot-swapping and portable charger
- **Battery Working Time:** 1 hr
- **Operating Temperature:** -20° to 50° C

Cameras

- **Type:** Three 5 MP cameras (15 MP)
- **FOV:** 210° x 170°

Other Included Hardware

- Chest Mount Harness
- Tablet

System

- **Control:** WIFI + button control
- **Storage:** 512 GB
- **Loop-free Data Acquisition:** Yes
- **Real-time Accuracy Assessment:** Yes
 - **System Performance**
 - **Absolute Accuracy:**
 - **H:** <5 cm RMS
 - **V:** <5 cm RMS
 - **Relative Accuracy:** <1 cm

Software

- **TrueView GO Tablet Software - See data capture in real time**
- **LP360 Land (options available)**
- **LP360 Cloud (optional)**
 - Access
 - Store & Share
 - Starter
 - Stream & View Data
 - Power Search
 - Automatic Ground Classification

Applications

- **AEC (Architecture, Engineering, Construction)**
- **Heritage Conservation**
- **Forestry**
- **Scan to BIM**
- **Facility Management**
- **Public Safety/Forensics**
- **Education**
- **Underground Mining**


Payload Specifications



Chest Harness with Tablet Mount



TrueView GO Field of View

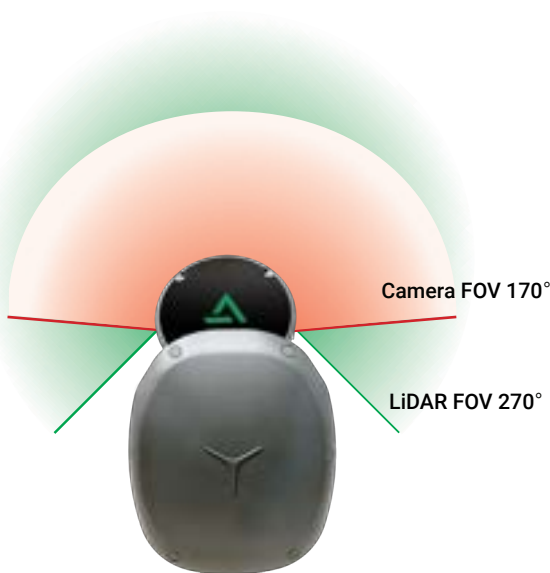

Features

Operate with Weak or No GNSS

TrueView Go calculates accurate RTK point coordinates using LiDAR and Visual SLAM data, achieving 5 cm precision within 1 minute, even in areas without satellite signals, enabling effective surveying in indoor spaces and urban canyons.

Remote Measurement

The technology has the capability to scan inaccessible areas by collecting reference points without being on the exact point. The TrueView Go tablet software calculates 3D coordinates in real-time with an accuracy of 5 cm within 15 m, allowing precise measurements without physical access.

Loop-Free Path Planning with RTK

There's no need to walk in circles. TrueView Go's SLAM technology eliminates the need for traditional loop closure and overlap, reducing the time and distance required for project completion by allowing flexible, efficient path planning when you have GNSS coverage.

Data



Figure 1 - Scan of the manufacturing area of GeoCue's Huntsville office



Figure 2 - Scan of rural street with houses



Precision Laser & Instrument, Inc.
85 11th Street
Ambridge, PA 15003
(724) 266-1600