


## PIPE & CABLE LOCATOR

The Single Frequency  
**Workhorse**  
that is field-proven  
for precise  
underground locating

- Cable
- Construction & Excavation
- Contract Locating
- Electrical Power
- Facilities Management
- Public Works
- Residential & Commercial
- Surveying
- Telephone
- Transportation
- Utilities
- Water & Sewer
- Gas & Oil Pipelines

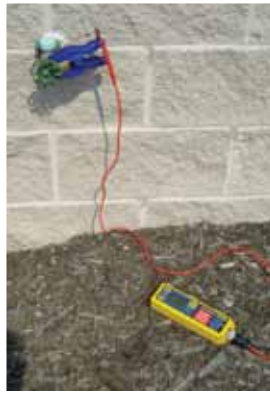

World of SCHONSTEDT



**SCHONSTEDT**   
INSTRUMENT COMPANY  
*Making Locating Easier Since 1953*

**SCHONSTEDT**  
MADE IN USA

100% EMPLOYEE-OWNED COMPANY

[www.schonstedt.com](http://www.schonstedt.com)

# SPECIFICATIONS

# SCHONSTEDT



## PIPE & CABLE LOCATOR



### Receiver

<b>Operating Frequency:</b>	82kHz or 33kHz (factory selectable) plus 50/60Hz passive detection
<b>Battery:</b>	9 V single battery
<b>Battery Life:</b>	18 hrs intermittent use
<b>LCD Display:</b>	3 1/2 digit reflective Signal Strength, Mode, Directional Arrows, Battery Status, Volume and Depth
<b>Controls:</b>	ON/Volume adjustment OFF DEPTH SONDE AUTO GAIN UP gain DOWN gain PASSIVE
<b>Dimensions:</b>	<b>Unit extended:</b> 26 in (~66 cm) <b>Unit collapsed:</b> 15.5 in (~39 cm)
<b>Weight:</b>	Under 2.5 Lbs


The XTpc comes with an extensive package of standard equipment including:

- Receiver & Transmitter
- Holster (p/n: PC10012)
- Conductive Clip Assembly (p/n: PC70000) which includes Standard Conductive Clips — C91010 (Red) and C91011 (Black)
- Hard Carrying Case (p/n: PC10100)
- Ground Stake (p/n: 208263)
- Auto Adapter for Transmitter (p/n: PC20013)
- Main Charging System (Converter, Power Supply & Cord) for Transmitter



Order/Info Hotline:  
**800-999-8280**

Order/Info Online:  
**www.schonstedt.com**

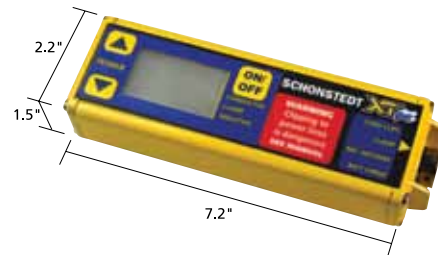

### Transmitter

<b>Operating Frequency:</b>	82kHz or 33kHz (factory selectable)
<b>Dimensions:</b>	7.2" L x 2.2" W x 1.5" H
<b>Battery Type:</b>	Rechargeable NiMH 7.2 V, 3800mAh
<b>Battery Life:</b>	8 hours continuous use
<b>Charging:</b>	12 V DC and 120 V AC charger
<b>Output Power:</b> (Conductive Mode)	33kHz - 1.8 W max 82kHz - 1.0 W max (FCC limited)
<b>Controls:</b>	ON/OFF UP Power DOWN Power
<b>LCD:</b>	3 1/2 digit reflective Battery Status, Mode, Output Power Level, Output Current (mA)
<b>Outputs:</b>	8-pin "Smart" CNC connector to: 1) Inductive antenna 2) Inductive clamp(s) 3) Conductive clips 4) Battery charger
<b>Weight:</b>	Under 2 lbs

# SCHONSTEDT

INSTRUMENT COMPANY

*Making Locating Easier Since 1953*  
an employee-owned company