

# FOCUS<sup>®</sup> 35 Series Total Station

**RX Models**  
NEW FOR 2016



**Productive, Reliable and  
Affordable Robotic Total Stations**



AFFORDABLE  
RELIABLE  
PRODUCTIVE



LO  
3  
S  
D  
C  
O  
F




## Featuring World Class Spectra Precision Field Software

Introducing the powerful Spectra Precision® FOCUS® 35 Series Total Stations. This fully robotic motorized solution provides improved speed, accuracy and precision in measurement. A robotic instrument moves the power of the observer from the instrument to the range pole improving the quality of your work.

### All robotic instruments include:

- Motorized drive system at the instrument
- A tracking sensor to track the range pole and prism
- A communication connection between the instrument and range pole and prism

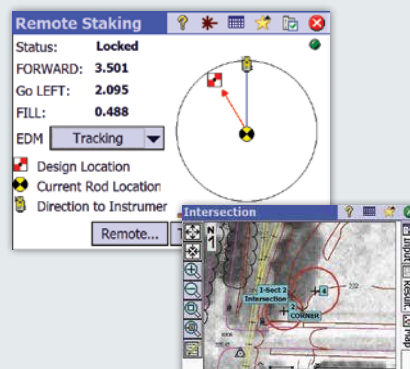



## StepDrive

The speed of observation and precise positioning of the FOCUS 35 robotic total station is provided by patented StepDrive™ technology. StepDrive controls the horizontal and vertical motion of the motors, so there is no need for traditional motion locks. Using the motorized drives it is possible to precisely turn to, and repeat angle measurements. This results in quick and reliable measurements which substantially increases your staking productivity.

## LockNGo

The Robotic and LockNGo™ FOCUS 35 models include a tracking sensor that uses LockNGo technology enabling the instrument to constantly lock onto the prism. The benefit of LockNGo technology is the ability to follow the prism at all times and reduces downtime from not having to re-point the instrument on every observation.

## Communication Link

To maintain contact between the FOCUS 35 instrument and the remote observer with the range pole and prism, the robotic solution must include a communication link. The FOCUS 35 uses an integrated 2.4 GHz radio modem as does the Spectra Precision Ranger™ 3 data collector. The 2.4 GHz radio modems provide interference free robotic data communications. Once your robotic communications have been established you can control all the functions of the FOCUS 35 from the range pole as you move through the job site making measurements. This makes it possible for a single surveyor to perform high accuracy stakeout, layout or topographic surveys by themselves. From high-order control surveys to topographic data collection or fast-paced construction layout, you can rely on a FOCUS 35, even in harsh outdoor conditions.

## FOCUS 35 and Survey Pro

The FOCUS 35 and Spectra Precision Survey Pro provide you with world class solutions for any surveying application. An example of these features includes a unique robotic software technology that can be used when associating the FOCUS 35 with a low-cost GPS receiver and Survey Pro software. This combination of technologies allows the user to take full advantage of the Spectra Precision GeoLock™ technology to keep locked on target.

## The Spectra Precision GeoLock technology

Offered in Survey Pro this technique allows a robotic total station to perform an aided search for an optical target using an initial GPS position. The remote instrument can then be directed towards the robotic roving operator using the GPS position and a subsequent search is quickly performed to re-acquire the target at the robotic rover. This technique greatly reduces wasted time, improving your field work efficiency.

## FOCUS 35 and Layout Pro

Spectra Precision Layout Pro™ software and the FOCUS 35 together offer the convenience of carrying, managing, editing, and laying out your job site blueprint. This combination is a critical tool in the field of construction layout and is designed to make the layout process more productive, accurate and reliable. For example, use Layout Pro to guide the layout of the major points, add string dimensions on the print, as well as calculate diagonals and angles.

## FOCUS 35 RX

The new FOCUS 35 RX models offer 12 hour extended operation through a unique dual battery system, eliminating any need to stop and change battery during a full day's work.

## Features

- Available in 1", 2", 3" and 5" angle accuracies
- Long-range, reflectorless distance measurement
- Available RX models with extended operation dual battery system
- Spectra Precision Survey Pro™ software on-board (available models)
- GeoLock™ GPS-assist technology



The FOCUS 35 solution is best described as Simply More Powerful. Packaged in a modern, sleek, and streamlined design, it is easy-to-use, affordable, and tough.

## Models Overview

	StepDrive motion	LockNGo tracking	GeoLock	2.4GHz radio
<b>Robotic</b>	Standard	Standard	Standard	Standard
<b>RX</b>	Standard	Standard	Standard	Standard
<b>LockNGo</b>	Standard	Standard	N/A	N/A
<b>StepDrive</b>	Standard	N/A	N/A	N/A

# FOCUS® 35 Total Station

## PERFORMANCE

### Angle measurement

Accuracy<sup>1</sup>  
(Standard deviation  
based on ISO 17123-3) . . . . . 1" (0.3 mgon),  
2" (0.6 mgon), 3" (1.0 mgon), or 5" (1.5 mgon)  
Angle reading (least count display)  
Standard . . . . . 1" (0.3 mgon)  
1" model . . . . . 0.5" (0.15 mgon)  
Tracking . . . . . 2" (0.6 mgon)

### Distance measurement<sup>2</sup>

Accuracy to Prism  
(Standard deviation based on ISO 17123-4)  
Standard . . . . . 2 mm + 2 ppm (0.007 ft + 2 ppm)  
Tracking . . . . . 5 mm + 2 ppm (0.016 ft + 2 ppm)  
Accuracy Reflectorless Mode  
Standard  
<300 m (984 ft) . . . . . 3 mm + 2 ppm (0.01 ft + 2 ppm)  
Standard  
>300 m (984 ft) . . . . . 5 mm + 2 ppm (0.016 ft + 2 ppm)  
Tracking . . . . . 10 mm + 2 ppm (0.033 ft + 2 ppm)  
Measuring time  
Prism Standard . . . . . 2.4 sec.  
Prism Tracking . . . . . 0.5 sec.  
Reflectorless Standard . . . . . 3–15 sec.  
Reflectorless Tracking . . . . . 0.7 sec.  
Range Prism Mode  
1 prism . . . . . 4000 m (13,123 ft)  
3 prisms . . . . . 7000 m (22,966 ft)  
Foil Reflector 60 mm . . . . . 300 m (984 ft)

Range Reflectorless Mode

	Good <sup>4</sup>	Normal <sup>5</sup>	Difficult <sup>6</sup>
KGC <sup>3</sup> (18%)	400 m (1,312 ft)	350 m (1,148 ft)	300 m (984 ft)
KGC (90%)	800 m (2,625 ft)	600 m (1,969 ft)	400 m (1,312 ft)
Foil Reflector 60 mm	1,000 m (3,280 ft)	1,000 m (3,280 ft)	800 m (2,625 ft)

Shortest possible range . . . . . 1.5 m (4.9 ft)

Automatic level compensator  
Type . . . . . dual-axis  
Accuracy . . . . . 0.5" (0.15 mgon)  
Working Range . . . . . ±5.5' (±100 mgon)

EDM SPECIFICATIONS  
EDM Laser and Principle  
Light source . . . . . Laser Diode 660 nm  
Principle . . . . . Phase Shift  
EDM Beam divergence  
Horizontal . . . . . 4 cm/100 m (0.13 ft/328 ft)  
Vertical . . . . . 3 cm/100 m (0.10 ft/328 ft)  
Atmospheric Correction . . . . . -150 ppm to 160 ppm  
continuously

GENERAL SPECIFICATIONS  
Coarse Leveling  
Electronic coarse leveling range . . . . . ±3° (±3.3 gon)  
Circular level in tribrach . . . . . 8/2 mm (8/0.007 ft)  
Drives  
Drive system . . . . . Spectra Precision® StepDrive™ system  
Rotation time maximum . . . . . 90°/sec (100 gon/sec)

Rotation time Face 1 to Face 2 . . . . . 3.7 sec.  
Positioning time 180° (200 gon) . . . . . 3.5 sec.  
Clamps and slow motions . . . . . StepDrive driven,  
endless fine adjustment  
Centering  
Centering system . . . . . 3-pin  
Plummet . . . . . Built-in optical plummet  
Magnification . . . . . 2.4 x  
Focusing distance . . . . . 0.5 m to ∞ (1.6 ft to ∞)

Telescope  
Magnification . . . . . 31x  
Aperture . . . . . 50 mm (1.96 in)  
Field of view . . . . . 1°30'  
Focusing distance . . . . . 1.5 m to ∞ (4.9 ft to ∞)  
Illuminated crosshair . . . . . Standard  
Tracklight built in . . . . . Standard  
Trunnion axis height . . . . . 196 mm (7.71 in)

Environmental  
Operating temperature . . . . . -20 °C to +50 °C  
(-4 °F to +122 °F)  
Dust and water proofing . . . . . IP55

Power supply<sup>7</sup>  
Internal battery . . . . . Li-Ion, 11.1 V/5.0 Ah  
Operating time with one internal battery . . . . . Approx. 6 hours  
Models with two internal batteries . . . . . Approx. 12 hours

Communications  
External foot connector . . . . . USB cable connection  
and external power supply  
Wireless communication . . . . . Bluetooth® (optional)

Weight  
Instrument . . . . . 5.0 kg (11.0 lb)  
Tribrach . . . . . 0.7 kg (1.54 lb)  
Internal battery . . . . . 0.3 kg (0.66 lb)

ROBOTIC SPECIFICATION  
Robotic Operation<sup>2</sup>  
Maximum Robotic Range . . . . . 300 m to 800 m  
(984 ft to 2,625 ft)  
Point precision at 200 m (656 ft) . . . . . <2 mm (0.007 ft)  
Maximum Search Distance . . . . . 300 m to 800 m  
(984 ft to 2,625 ft)  
Search Time (typical) . . . . . 2–10 sec.

Communications  
internal/external . . . . . 2.4 GHz, frequency hopping,  
spread spectrum

GPS Search GeoLock<sup>8</sup>  
GPS Search GeoLock™ . . . . . 360° (400 gon)  
Range . . . . . Full robotic operation range

DATA COLLECTION  
Control Units fixed on alidade  
Face 1 (optional)  
Display . . . . . 3.5" TFT color touch screen,  
320x240 Pixel, backlight  
Keyboard . . . . . Alphanumeric keypad  
Memory (data storage) . . . . . 128 MB RAM, 1 GB Flash  
Field App. Software . . . . . Survey Pro and Layout Pro  
Face 2  
Display . . . . . 6 lines, monochrome, 96x49 Pixel, backlight  
Keyboard . . . . . 4 keys  
Instrument Software Functions . . . . . Change Face  
Radio and Instrument Settings,  
Measurement Value Display, Leveling



## CERTIFICATION

Class B Part 15 FCC certification, CE Mark approval.  
C-Tick.  
Laser safety IEC 60825-1 am2:2007  
Prism Mode: Class 1  
Reflectorless/Laser Pointer: Class 3R laser  
Bluetooth type approvals are country specific.

- 1 RX models are not available in 1" accuracy.
- 2 Standard clear: No haze, overcast or moderate sunlight with very light heat shimmer. Range and accuracy are dependent on atmospheric conditions, size of prism and background radiation.
- 3 Kodak Gray Card, Catalog number E1527795.
- 4 Good conditions (good visibility, overcast, twilight, underground, low ambient light)
- 5 Normal conditions (normal visibility, object in the shadow, moderate ambient light).
- 6 Difficult conditions (haze, object in direct sunlight, high ambient light).
- 7 RX models have two internal batteries.
- 8 Spectra Precision GeoLock is available on data collectors after station setup.



## Contact Information:

### AMERICAS

Spectra Precision Division  
10368 Westmoor Drive  
Westminster, CO 80021 • USA  
+1-720-587-4700 Phone  
888-477-7516 (Toll Free in USA)

### EUROPE, MIDDLE EAST AND AFRICA

Spectra Precision Division  
Rue Thomas Edison  
ZAC de la Fleuriaye – CS 60433  
44474 Carquefou (Nantes) • FRANCE  
+33-(0)2-28-09-38-00 Phone

### ASIA-PACIFIC

Spectra Precision Division  
80 Marine Parade Road  
#22-06, Parkway Parade  
Singapore 449269 • SINGAPORE  
+65-6348-2212 Phone



www.spectraprecision.com

Please visit [www.spectraprecision.com](http://www.spectraprecision.com) for the latest product information and to locate your nearest distributor. Specifications and descriptions are subject to change without notice.

© 2015, Trimble Navigation Limited. All rights reserved. Spectra Precision is a Division of Trimble Navigation Limited. Spectra Precision and the Spectra Precision logo are trademarks of Trimble Navigation Limited or its subsidiaries. FOCUS is a trademark of Spectra Precision. StepDrive is an unregistered trademark of Trimble Navigation Limited. The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks is under license. Windows Mobile is a trademark of Microsoft Corporation, registered in the United States and/or other countries. All other trademarks are the property of their respective owners. PN 022487-168 (2015/10)

SCAN THIS CODE FOR MORE INFORMATION

